

Rotary Tiller 5800 Series

Gear Driven

4' 5' 6'



Engineered for Performance and Built for Years of Dependable Operation.


SPECIFICATIONS

	4'	5'	6'
Width	4'	5'	6'
Heavy Duty Cast Iron Gear Box	Standard	Standard	Standard
Slip Clutch	Standard	Standard	Standard
Cat 1 Quick Hitch	Standard	Standard	Standard
Parking Stand	Standard	Standard	Standard
Number of Tines Per Flange	6	6	6
Number of Flanges	6	7	9
Total Number of Tines	36	42	54
Long Life Hard Carbon Steel Tines	Standard	Standard	Standard
Replaceable Skid Shoes	Standard	Standard	Standard
Approximate Ship Weight	600 LBS	690 LBS	780 LBS
Recommended PTO HP	20-35	25-40	35-50
Quick Hitch Compatible	Yes	Yes	Yes

Specifications are subject to change without notice.



BACK

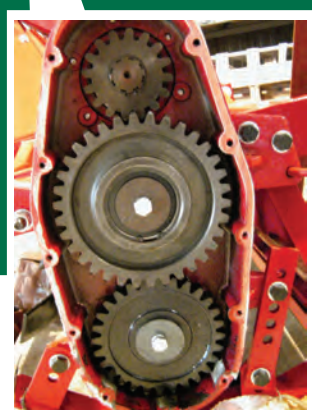

Adjustable Rear Deflector Shield Controls Dirt for a Smooth Finish

Rugged Gear Drive Transmission